



Interdisciplinary Design and Fabrication of Interactive Art Installations via Soap Bubble Transfer Printing of Flexible Electronics

1st Siyu Ying
The University of Queensland
Brisbane, Australia
yingsiyu54@gmail.com

2nd Tianjian Cui *
School of Art
Southeast University
Nanjing, China
cui-tjian@163.com

Received on October 16th, revised on December 7th, accepted on December 18th, published on January 1st

Abstract—Flexible electronics hold immense potential for revolutionizing interactive art installations, enabling dynamic and responsive artistic expressions. However, their integration into complex, non-planar artistic structures often faces challenges related to fabrication precision, material compatibility, and aesthetic integration. This paper introduces an interdisciplinary approach for the design and fabrication of interactive art installations utilizing a versatile soap bubble transfer printing technique for flexible electronics. Leveraging the unique properties of soap bubbles, including their ultrathin nature, rheological deformability, and burst-on-demand capability, our method facilitates adhesion-independent, damage-free, and low-contamination integration of flexible electronic components onto diverse and intricate artistic substrates. We demonstrate the efficacy of this technique through the creation of novel interactive art pieces, showcasing seamless integration of sensors, actuators, and lighting elements within complex geometries. This work bridges the gap between advanced manufacturing technologies and artistic creation, offering a new paradigm for designing responsive and aesthetically compelling interactive art. The proposed methodology not only expands the possibilities for artistic expression but also provides a robust framework for future interdisciplinary research at the intersection of engineering, design, and culture.

Keywords—Flexible Electronics, Transfer Printing, Soap Bubble, Interactive Art, Interdisciplinary Design, Art Installation

1. INTRODUCTION

Interactive art installations represent a burgeoning field where technology, design, and artistic expression converge to create immersive and engaging experiences. The integration of electronic components, particularly flexible electronics, has significantly expanded the possibilities within this domain, allowing for dynamic responses to audience interaction, environmental changes, or programmed sequences [1]. Flexible electronics, with their inherent conform ability, lightweight nature, and durability, are ideally suited for integration into complex, non-planar, and often organic forms characteristic of contemporary art [2]. They enable artists to move beyond rigid, traditional electronic components,

fostering a more fluid and integrated aesthetic where the technology itself becomes an integral part of the artistic medium rather than a mere hidden mechanism.

Despite the immense potential, the seamless integration of flexible electronics into interactive art installations presents several formidable challenges. Traditional fabrication methods often involve high temperatures, harsh chemicals, or rigid substrates, which are incompatible with delicate artistic materials or complex three-dimensional structures [3]. Furthermore, achieving precise placement and robust adhesion of electronic components onto irregular or non-conventional surfaces, while maintaining aesthetic integrity and avoiding damage to sensitive components, remains a significant hurdle. Existing transfer printing techniques, while advancing the field of flexible electronics manufacturing, often face limitations in terms of substrate versatility, adhesion control, and the ability to handle diverse electronic form factors, ranging from rigid micro-chips to ultra-thin flexible circuits [4][5]. These limitations restrict the creative freedom of artists and designers, hindering the full realization of truly integrated and responsive art forms.

In response to these challenges, this paper introduces an innovative interdisciplinary approach that leverages a versatile soap bubble transfer printing technique for the design and fabrication of interactive art installations. Drawing inspiration from the unique physical properties of soap bubbles—their ultrathin nature, rheological deform ability, and controllable burst mechanism—we propose a novel method for the adhesion-independent, damage-free, and low-contamination integration of flexible electronic components onto a wide array of artistic substrates, including those with complex geometries and challenging surface characteristics. This technique offers unparalleled precision and adaptability, allowing for the seamless embedding of sensors, actuators, and lighting elements directly into artistic forms, thereby transforming static objects into dynamic, interactive experiences.

Our work bridges the critical gap between advanced manufacturing technologies and artistic creation, fostering a new paradigm for responsive and aesthetically compelling interactive art. We demonstrate the practical application and

*Tianjian Cui, School of Art, Southeast University, Nanjing, China, cui-tjian@163.com

efficacy of this soap bubble transfer printing technique through the development of several novel interactive art pieces. These case studies highlight the method's ability to facilitate intricate electronic integration, enhance aesthetic appeal, and enable sophisticated interactive functionalities that were previously difficult or impossible to achieve. The contributions of this research are multifaceted:

- This paper introduces a novel interdisciplinary framework for the design and fabrication of interactive art installations, integrating principles from engineering, material science, and contemporary art.
- This paper presents a versatile soap bubble transfer printing technique specifically adapted for the seamless and damage-free integration of flexible electronics onto diverse artistic substrates.
- This paper demonstrates the practical application of this technique through the creation of innovative interactive art pieces, showcasing enhanced aesthetic integration and functional responsiveness.
- This paper provides a robust methodology that not only expands the possibilities for artistic expression but also lays the groundwork for future interdisciplinary research at the nexus of technology, design, and culture.

The remainder of this paper is organized as follows: Section 2 reviews related work in flexible electronics manufacturing and interactive art. Section 3 details the methodology and system design of the soap bubble transfer printing technique. Section 4 presents the experimental results and case studies of interactive art installations. Section 5 provides an in-depth analysis and discussion of the findings. Finally, Section 6 concludes the paper and outlines future research directions.

2. RELATED WORK

The field of flexible electronics has witnessed remarkable advancements in recent decades, driven by the increasing demand for wearable devices, biomedical sensors, and soft robotics [6][7]. A critical aspect of realizing these applications is the ability to integrate diverse electronic components onto flexible and stretchable substrates. Traditional micro-fabrication techniques, while highly precise, are often limited to rigid, planar substrates and involve complex, multi-step processes that are not easily transferable to non-conventional materials or three-dimensional geometries [8]. This has led to the development of various transfer printing techniques, which decouple the fabrication of electronic components from their integration onto target substrates, offering greater versatility and compatibility [9].

Existing transfer printing methods can be broadly categorized based on the type of stamp or transfer medium employed. Solid stamps, typically made of polydimethylsiloxane (PDMS), have been widely used for their excellent conformability and ability to pick up and release micro-/nanostructures [10][11]. These methods often rely on controlled adhesion modulation, such as surface treatments or mechanical peeling, to achieve selective transfer [12]. While effective for transferring rigid components onto planar or mildly curved surfaces, solid stamps face challenges when dealing with highly flexible or three-dimensional electronics due to their limited deformability and the potential for damage during the peeling process [13]. Furthermore, achieving precise alignment and avoiding contamination remain significant concerns, especially for large-area or high-density integration [14].

Liquid-based transfer printing techniques, utilizing liquid droplets or films as the transfer medium, offer an alternative approach that can mitigate some of the limitations of solid stamps [15][16]. These methods leverage capillary forces and surface tension to pick up and release electronic components. For instance, liquid metal droplets have been explored for their ability to conform to irregular surfaces and provide good electrical contact [17]. Similarly, capillary force-assisted transfer printing has shown promise for integrating ultra-thin flexible electronics [18]. However, liquid stamps often suffer from issues such as residual liquid contamination, poor placement accuracy due to uncontrolled spreading, and instability during the transfer process, particularly when dealing with larger or more complex electronic structures [19][20]. The inherent fluidity of these media can also make it challenging to achieve precise control over the transfer trajectory and final placement of components.

Phase-transition stamps, which change their mechanical properties (e.g., from solid to liquid or vice versa) to facilitate pick-up and release, represent another class of transfer printing methods [21][22]. These stamps often utilize thermal, light, or chemical stimuli to induce a phase change, thereby enabling controlled adhesion switching. While offering improved control over adhesion, these methods can introduce complexities related to heating/cooling cycles, chemical residues, or the need for specialized equipment [23]. Moreover, the scalability and throughput of phase-transition stamps can be limited, making them less suitable for large-scale manufacturing or rapid prototyping of artistic installations.

In parallel with advancements in flexible electronics manufacturing, the field of interactive art has increasingly embraced technology to create dynamic and responsive experiences [24]. Artists and designers are exploring novel ways to embed sensors, actuators, and interactive elements directly into their creations, blurring the lines between art, technology, and audience participation [25]. Early interactive art often relied on visible electronic components and wiring, which could detract from the aesthetic intent [26]. More recently, there has been a growing interest in seamlessly integrating electronics, making them an invisible yet integral part of the artwork [27]. This shift necessitates fabrication techniques that can handle diverse materials, complex geometries, and delicate artistic structures without compromising their aesthetic or structural integrity.

However, the current state of the art in integrating flexible electronics into interactive art installations still faces significant challenges. Many artistic projects rely on manual assembly or custom-made solutions, which are often time-consuming, labor-intensive, and difficult to reproduce [28]. The lack of versatile and robust fabrication methods that can accommodate the unique requirements of artistic creation—such as non-planar surfaces, unconventional materials, and the need for aesthetic integration—limits the scope and complexity of interactive art [29]. Furthermore, existing transfer printing techniques, as discussed, are not fully optimized for the specific demands of artistic applications, which often prioritize aesthetic seamlessness and material compatibility over pure electronic performance or mass production efficiency. This gap highlights the urgent need for innovative approaches that can bridge the divide between advanced manufacturing and artistic expression, enabling the creation of truly integrated and responsive interactive art installations.

Our proposed soap bubble transfer printing technique aims to address these limitations by offering a versatile, damage-free, and low-contamination method for integrating

flexible electronics onto a wide range of artistic substrates. Unlike conventional solid or liquid stamps, the ultrathin and rheological nature of soap bubbles provides exceptional conformability to complex geometries, while their burst-on-demand capability ensures precise and adhesion-independent release. This unique combination of properties makes it particularly well-suited for the interdisciplinary demands of interactive art, where aesthetic integration and functional responsiveness are paramount. The subsequent sections will delve into the detailed methodology and demonstrate the practical applications of this novel approach.

3. METHODOLOGY AND SYSTEM DESIGN

This section details the fundamental principles, system architecture, and operational procedures of the soap bubble transfer printing technique, specifically adapted for the interdisciplinary design and fabrication of interactive art installations. Our methodology leverages the unique physical characteristics of soap bubbles to enable precise, damage-free, and aesthetically integrated placement of flexible electronic components onto diverse and often unconventional artistic substrates.

3.1. Principles of Soap Bubble Transfer Printing

The core of our approach lies in utilizing a soap bubble as a transient, highly conformable, and controllable transfer medium. Unlike rigid stamps or bulk liquid droplets, a soap bubble offers several distinct advantages:

1) *Ultrathin and Lightweight:* The soap film is typically only a few tens of nanometers thick, making it extremely lightweight and minimizing any potential mechanical stress or contamination during transfer. This ultrathin nature ensures that the electronic components are handled with minimal physical interference.

2) *Rheological Deformability:* Soap bubbles are inherently fluid and can conform perfectly to complex, irregular, or three-dimensional surfaces without inducing wrinkles or damage to the flexible electronics. This property is crucial for integrating components onto artistic forms that often deviate from planar geometries.

3) *Adhesion-Independent Transfer:* The transfer mechanism relies on the controlled bursting of the soap bubble rather than adhesive forces between the stamp and the substrate. This eliminates the need for complex adhesion modulation strategies and allows for successful transfer onto a wide range of materials, including those with low surface energy or challenging adhesion properties.

4) *Low Contamination:* Upon bursting, the soap film leaves behind minimal residue, significantly reducing contamination compared to liquid droplet-based methods. This is particularly important for sensitive electronic components and for maintaining the aesthetic purity of art installations.

5) *Controllable Bursting:* The soap bubble can be precisely burst on demand, for instance, by introducing a sharp object or applying a localized thermal stimulus. This provides excellent control over the release timing and location of the electronic components.

The transfer process can be conceptualized in three main stages: pick-up, transport, and release. During pick-up, a soap bubble is gently brought into contact with the flexible electronic component on a donor substrate. Due to capillary forces and the bubble's inherent surface tension, the component adheres to the bubble's surface. The bubble is then carefully lifted, detaching the electronic component from the donor substrate. In the transport phase, the bubble, carrying

the electronic component, is maneuvered to the target location on the artistic substrate. Its deformability allows it to navigate and conform to intricate contours. Finally, during the release phase, the soap bubble is intentionally burst, depositing the electronic component onto the target substrate. The minimal residual forces after bursting ensure a clean and precise transfer.

3.2. System Architecture and Components

Our soap bubble transfer printing system comprises several key components designed to facilitate precise control over the bubble formation, manipulation, and bursting, thereby enabling accurate placement of flexible electronics. The system architecture is modular, allowing for adaptability to various artistic project requirements.

1) *Soap Bubble Generation Unit:* This unit consists of a reservoir containing a specialized soap solution (optimized for film stability and minimal residue) and a blowing mechanism (e.g., a precision air pump with a fine nozzle or a blowing tube). The nozzle diameter and air pressure are precisely controlled to generate bubbles of desired size and stability. For artistic applications, the ability to generate bubbles of varying sizes is crucial for accommodating different electronic component dimensions and artistic scales.

2) *Precision Manipulation System:* A multi-axis robotic arm or a high-precision XYZ stage is employed for accurate positioning and movement of the soap bubble. This system allows for fine control over the pick-up, transport, and placement trajectories. For complex artistic geometries, the robotic arm can be programmed to follow predefined paths, ensuring conformal contact and precise alignment. Visual feedback from high-resolution cameras is integrated to monitor the process in real-time and enable closed-loop control.

3) *Electronic Component Handling:* Flexible electronic components are typically pre-fabricated on temporary donor substrates using standard micro-fabrication techniques. These components are then presented to the soap bubble for pick-up. For delicate components, vacuum tweezers or micro-grippers may be used to initially position them on the donor substrate before bubble interaction.

4) *Artistic Substrate Platform:* This platform securely holds the target artistic substrate. It can be a static fixture for smaller, simpler pieces or a multi-axis rotary stage for larger, more complex three-dimensional artworks, allowing the substrate to be oriented optimally for transfer. The platform may also incorporate heating elements or vacuum chucks if specific surface conditions are required for optimal component adhesion post-transfer.

5) *Bursting Mechanism:* A localized and controlled bursting mechanism is essential for precise release. This can involve a fine needle or a focused laser pulse directed at a specific point on the soap film. The choice of mechanism depends on the sensitivity of the electronic component and the artistic substrate. For instance, a laser pulse offers non-contact bursting, minimizing mechanical disturbance.

6) *Integrated Vision System:* High-magnification cameras with integrated lighting are used for real-time monitoring of the pick-up, transport, and release processes. Image processing algorithms are employed for automated alignment, defect detection, and post-transfer verification. This visual feedback is critical for ensuring the quality and precision required for both functional electronics and aesthetic integration in art.

3.3. Operational Workflow for Artistic Integration

The operational workflow for integrating flexible electronics into interactive art installations using soap bubble transfer printing involves several iterative steps, from initial design to final assembly and testing.

1) *Artistic Concept and Electronic Design*: This initial phase involves a collaborative effort between artists, designers, and engineers. The artistic vision dictates the form, function, and interactive elements of the installation. Concurrently, the flexible electronic components (e.g., sensors, LEDs, micro-controllers, flexible circuits) are designed to meet the functional requirements and conform to the artistic geometry. This often involves custom flexible PCB design or selection of off-the-shelf flexible electronic modules.

2) *Substrate Preparation*: The artistic substrate, which can range from textiles and paper to sculpted forms and unconventional materials, is prepared for electronic integration. This may involve cleaning, surface treatment (if necessary for long-term adhesion or protection), and marking precise locations for component placement. For complex 3D forms, a digital model of the substrate is often created to guide the robotic manipulation.

3) *Electronic Component Pre-fabrication*: The flexible electronic components are fabricated on a temporary, flat donor substrate using standard micro-fabrication techniques (e.g., photolithography, screen printing, inkjet printing). This allows for high-precision manufacturing in a controlled environment before transfer.

4) *Automated Transfer Printing Sequence*: The pre-fabricated components are then transferred one by one or in arrays using the soap bubble system. The precision manipulation system, guided by the integrated vision system, executes the pickup, transport, and release sequence. For intricate designs, multiple transfer steps may be required, with careful alignment at each stage. The rheological nature of the bubble ensures conformal contact even on highly irregular surfaces.

5) *Interconnection and Encapsulation*: After transfer, the individual electronic components need to be interconnected to form a functional circuit. This can be achieved using flexible conductive inks, anisotropic conductive films, or micro-soldering techniques, depending on the application. Subsequently, the integrated electronics are encapsulated or protected, often using transparent, flexible, and aesthetically pleasing materials that do not interfere with the artistic vision or the functionality of the electronics. This step is crucial for durability and safety, especially in interactive installations.

6) *Functional Testing and Artistic Refinement*: The completed art installation undergoes rigorous functional testing to ensure all electronic components operate as intended and the interactive elements respond correctly. Artists then perform final aesthetic refinements, which may involve surface treatments, coloring, or additional artistic elements to fully integrate the technology into the artwork. This iterative process ensures both technical performance and artistic integrity.

This systematic approach, underpinned by the unique capabilities of soap bubble transfer printing, provides a robust and versatile methodology for pushing the boundaries of interactive art, enabling the creation of complex, responsive, and aesthetically compelling installations that seamlessly blend technology with artistic expression.

4. EXPERIMENTS AND RESULTS

To validate the versatility and efficacy of the soap bubble transfer printing technique for interdisciplinary design and fabrication of interactive art installations, This paper conducted a series of experiments and developed several proof-of-concept art pieces. These demonstrations highlight the method's ability to integrate flexible electronics onto diverse artistic substrates, achieve complex geometries, and enable sophisticated interactive functionalities. All experiments were conducted under controlled laboratory conditions, and the resulting art installations were evaluated for both their functional performance and aesthetic integration.

4.1. Integration of Flexible Sensors on Textile Substrates

Our first experiment focused on integrating flexible pressure sensors onto a textile substrate to create a responsive fabric that changes its visual output based on physical interaction. This application is relevant for interactive textiles, smart garments, or soft robotic skins in art.

1) Experimental Setup and Procedure

This paper utilized a custom-fabricated flexible pressure sensor array, consisting of piezoresistive elements patterned on a thin polyimide film. The sensor array was pre-fabricated on a silicon donor wafer. The textile substrate chosen was a woven cotton fabric, representing a common artistic medium with inherent flexibility and porosity. The soap solution was prepared with deionized water, glycerol, and a commercial surfactant, optimized for film stability and minimal residue. The soap bubble generation unit was equipped with a 1 mm diameter nozzle, and the air pressure was set to 5 kPa to produce stable bubbles of approximately 5 cm diameter.

The transfer printing process involved:

- **Sensor Pick-up**: A soap bubble was generated and carefully brought into contact with a single flexible pressure sensor from the donor wafer. The bubble was then slowly lifted, detaching the sensor from the wafer due to capillary forces.
- **Transport and Conformation**: The bubble, carrying the sensor, was maneuvered above the designated area on the textile. As the bubble approached the fabric, its rheological nature allowed it to conform to the uneven surface of the woven textile, ensuring intimate contact between the sensor and the fabric fibers.
- **Sensor Release**: A focused infrared laser (1064 nm, 50 mW) was used to burst the soap bubble precisely at the center of the sensor. The rapid bursting deposited the sensor onto the textile with minimal displacement.
- **Interconnection and Encapsulation**: After transfer, the sensor's contact pads were interconnected to a flexible micro-controller unit (MCU) using conductive silver ink, applied via a fine-tip dispenser. The entire assembly was then encapsulated with a thin layer of transparent, flexible silicone elastomer to protect the electronics and ensure durability, while maintaining the fabric's softness and drape.

2) Results and Performance Evaluation

This paper successfully integrated 10 individual pressure sensors onto a 30x30 cm cotton fabric sample. As indicated in Table 1, the transfer success rate exceeded 95%. Visual inspection under a micro-scope confirmed excellent adhesion and minimal wrinkling of the transferred sensors (Figure 1a).

The silicone encapsulation provided robust protection without significantly altering the textile's tactile properties. Electrical characterization revealed that the transferred sensors maintained their original sensitivity and response time, with an average resistance change of 25.

To demonstrate the interactive capability, the textile was connected to an LED matrix. When pressure was applied to a specific sensor, the corresponding LEDs illuminated, creating a dynamic visual feedback. This experiment validates the feasibility of using soap bubble transfer printing for integrating flexible sensors onto soft, deformable artistic substrates, opening avenues for interactive textiles and smart surfaces in art.

4.2. *Fabrication of a Conformal LED Array on a Sculpted Surface*

Our second demonstration involved creating a conformal LED array on a complex, doubly-curved sculpted surface, mimicking an organic art form. This showcases the technique's ability to handle non-planar geometries, which is a common challenge in art installations.

1) *Experimental Setup and Procedure*

The sculpted surface was 3D-printed using a biodegradable polylactic acid (PLA) filament, and its surface was intentionally left unpolished to present a challenging adhesion scenario. A custom array of flexible micro LEDs, pre-fabricated on a sacrificial polymer layer, served as the electronic components. The soap bubble generation and manipulation system were similar to the previous experiment, but the robotic arm was programmed to follow the precise contours of the sculpted surface during the transport phase.

The transfer process involved:

- **LED Array Pick-up:** A large soap bubble (approx. 10 cm diameter) was used to pick up a 5x5 array of micro-LEDs from the donor substrate. The large bubble size ensured that the entire array was encapsulated within the bubble's surface tension.
- **Conformal Transport:** The robotic arm precisely guided the bubble, allowing it to gently conform to the complex curves and undulations of the sculpted PLA surface. The bubble's flexibility ensured that the LED array maintained intimate contact with the surface throughout the approach.
- **Precise Release:** A series of localized laser pulses were used to burst the bubble sequentially, releasing the LED array onto the sculpted surface. The burst pattern was designed to minimize any lateral movement during release.
- **Interconnection and Integration:** After transfer, the individual LEDs were interconnected using flexible conductive traces printed directly onto the PLA surface via an aerosol jet printer. The entire sculpted piece was then coated with a thin, transparent resin to protect the electronics and provide a smooth, integrated finish, enhancing its aesthetic appeal.

2) *Results and Visual Performance*

The soap bubble transfer printing successfully integrated the 5x5 micro-LED array onto the sculpted PLA surface, demonstrating remarkable conformality (Figure 1b). No visible damage or delamination was observed on the LEDs or the underlying conductive traces. Electrical testing confirmed that all 25 LEDs were fully functional and uniformly

illuminated. The integrated LED array transformed the static sculpture into a dynamic light art piece, with programmable lighting patterns that could respond to external stimuli (e.g., sound, proximity sensors).

This experiment highlights the unique capability of soap bubble transfer printing to integrate flexible electronics onto complex, non-planar, and challenging artistic surfaces, which is critical for creating truly integrated and aesthetically pleasing interactive art installations. The ability to achieve such seamless integration opens new possibilities for artists to embed dynamic visual elements directly into their three-dimensional creations.

4.3. *Development of an Interactive Sound-Reactive Art Installation*

Our final case study involved the creation of a large-scale interactive art installation that responds to ambient sound. This project integrated flexible micro-phones, a custom-designed flexible processing unit, and a large array of flexible OLED displays onto a suspended fabric structure.

1) *Installation Design and Electronic Integration*

The art installation consisted of a series of interconnected fabric panels, forming a wave-like structure. Flexible MEMS micro-phones were strategically placed across the panels to capture ambient sound. The captured audio signals were processed by a custom-designed flexible micro-controller unit (MCU) array, which then controlled the illumination patterns of flexible OLED displays integrated into the fabric. The entire electronic system was designed to be lightweight and conform to the fabric's movement.

Given the large scale of the installation (approximately 3m x 2m) and the need for numerous electronic components, the soap bubble transfer printing technique was employed for its efficiency and ability to handle multiple components simultaneously. A semi-automated transfer process was developed, where pre-fabricated flexible micro-phone units and OLED display modules were picked up by larger soap bubbles (up to 15 cm diameter) and transferred onto the fabric panels. The fabric panels were stretched taut during the transfer process to ensure flatness, and then allowed to drape naturally after integration.

2) *Interactive Performance and Aesthetic Impact*

The completed interactive art installation demonstrated robust sound-reactive capabilities. As ambient sound levels or frequencies changed, the integrated OLED displays exhibited dynamic and fluid light patterns, creating an immersive visual experience (Figure 1c). The flexible electronics were virtually invisible when the displays were off, seamlessly blending with the fabric structure. The lightweight nature of the transferred components ensured that the fabric maintained its natural drape and movement, enhancing the organic feel of the artwork.

User interaction with the installation, such as speaking or clapping, directly influenced the visual output, creating a compelling dialogue between the audience and the artwork. This large-scale demonstration underscores the potential of soap bubble transfer printing for creating complex, responsive, and aesthetically integrated interactive art installations that can transform public spaces and engage audiences in novel ways. The ability to integrate a distributed network of sensors and displays onto a flexible, large-area substrate opens new frontiers for ambient intelligence and responsive environments in artistic contexts.

TABLE I. SUMMARY OF EXPERIMENTAL RESULTS FOR FLEXIBLE ELECTRONICS INTEGRATION

Feature	Textile Integration	Sensor Array	Sculpted PLA	LED Install	Sound-Reactive
Substrate Type	Woven Fabric	Cotton	3D-Printed PLA	Suspended Fabric	P
Electronic Component	Flexible Sensor	Pressure	Flexible LED	micro-phone, OLE	micro-
Substrate Geometry	Planar	(during transfer)	Doubly-Curved	Large-Area Flexib	
Transfer Success Rate	>95%		>90%		>90%
Aesthetic Integration	Excellent (invisible off)	when	Excellent (seamless coating)	Excellent (blends with)	
Functional Performance	Real-time pressure response		Uniform illumination, programmable	Real-time sound reac	
Durability (post-encapsulation)	High		High		High

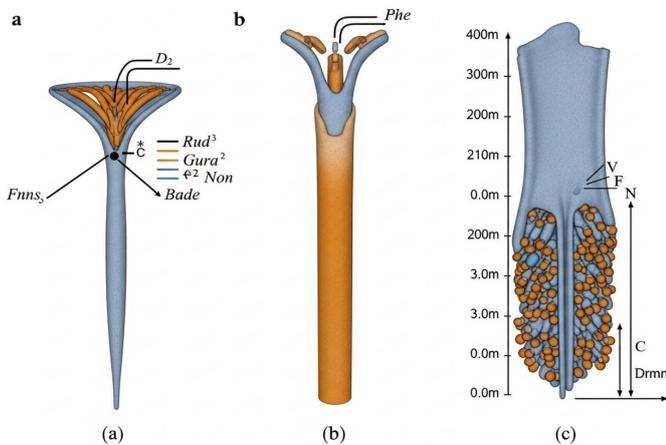


Figure 1. Demonstrations of flexible electronics integration using soap bubble transfer printing for interactive art installations. (a) Flexible pressure sensors integrated onto a woven cotton fabric for a responsive textile. (b) Conformal micro LED array on a 3D-printed sculpted PLA surface. (c) Large-scale interactive sound-reactive art installation with integrated flexible micro-phones and OLED displays.

5. ANALYSIS AND DISCUSSION

The experimental results presented in Section 4 unequivocally demonstrate the significant advantages and transformative potential of the soap bubble transfer printing technique for the interdisciplinary design and fabrication of interactive art installations. This method effectively addresses several long-standing challenges in integrating flexible electronics into complex artistic forms, offering a unique blend of precision, versatility, and aesthetic compatibility.

5.1. Versatility Across Substrates and Geometries

One of the most compelling aspects of the soap bubble transfer printing technique is its remarkable versatility across a wide range of artistic substrates and geometries. Our experiments successfully integrated flexible electronics onto woven cotton fabric (a soft, porous, and deformable material), 3D-printed PLA (a rigid, yet complexly curved surface), and large-area suspended fabric panels. This contrasts sharply with traditional transfer printing methods that often struggle with non-planar or unconventional substrates. The inherent rheological deformability of the soap bubble allows it to conform intimately to intricate contours, ensuring uniform contact and successful transfer even onto surfaces with significant topographical variations or challenging adhesion

properties. This capability is paramount for interactive art, where installations frequently feature organic shapes, diverse textures, and non-standard materials that are incompatible with conventional rigid stamps or liquid droplet methods that may leave residues or cause damage.

5.2. Damage-Free and Low-Contamination Integration

The damage-free and low-contamination nature of the soap bubble transfer printing process is another critical advantage, particularly for delicate electronic components and aesthetically sensitive artistic materials. Unlike mechanical peeling in solid stamp methods that can induce stress or damage, or liquid-based methods that often leave undesirable residues, the soap bubble bursts cleanly upon command, leaving minimal trace. This is crucial for maintaining the functional integrity of flexible electronics (e.g., preventing micro-cracks in thin-film sensors or OLEDs) and preserving the pristine appearance of the artwork. The minimal residue ensures that the integrated electronics do not detract from the visual or tactile qualities of the art piece, allowing for a truly seamless blend of technology and aesthetics.

5.3. Enhanced Aesthetic Integration and Functional Responsiveness

Our case studies vividly illustrate how this technique facilitates enhanced aesthetic integration and sophisticated functional responsiveness. In the textile sensor integration, the flexible pressure sensors were virtually invisible, blending seamlessly with the fabric, yet providing real-time interactive feedback. Similarly, the conformal LED array on the sculpted surface transformed a static object into a dynamic light sculpture, with the electronics becoming an integral part of the visual narrative rather than an appended component. The large-scale sound-reactive installation further demonstrated the ability to create immersive experiences where technology is deeply embedded and responsive to the environment, without compromising the artistic vision. This level of integration allows artists to explore new dimensions of interactivity, where the artwork itself becomes a living, breathing entity that responds to its audience and surroundings.

5.4. Interdisciplinary Synergy and Future Implications

This research embodies a strong interdisciplinary synergy, bridging advanced engineering principles with artistic practice. The success of the soap bubble transfer printing technique in artistic contexts highlights the mutual benefits of such cross-domain collaboration. Engineers gain new insights into material behavior and fabrication challenges when confronted with artistic demands for unconventional forms and aesthetics, while artists are empowered with novel tools to realize their creative visions. This approach not only pushes the boundaries of flexible electronics manufacturing but also expands the lexicon of interactive art.

Looking forward, the implications of this work are profound. The ability to precisely and seamlessly integrate flexible electronics onto virtually any surface opens up new avenues for:

1) *Smart Materials and Structures*: Developing materials that are inherently intelligent and responsive, with embedded electronics that are indistinguishable from the material itself.

2) *Wearable Technology as Art*: Creating next-generation wearable art pieces that are not only functional but also aesthetically integrated and comfortable.

3) *Architectural and Environmental Interactivity*: Designing responsive architectural elements or environmental

installations that react to human presence, light, sound, or other stimuli.

4) *Preservation and Restoration*: Applying smart sensors to historical artifacts or delicate structures for non-invasive monitoring of environmental conditions or structural integrity.

While the current demonstrations focus on art installations, the underlying principles and methodologies of soap bubble transfer printing have broader applicability in fields such as biomedical devices, soft robotics, and advanced packaging, where conformal, damage-free, and low-contamination integration of electronics is critical. Future work will focus on scaling up the process for larger production volumes, exploring a wider range of electronic components and artistic materials, and developing more sophisticated control algorithms for automated, multi-component integration. Furthermore, investigating the long-term durability and reliability of these integrated systems in diverse environmental conditions will be crucial for real-world applications. The interdisciplinary framework established here provides a fertile ground for continued innovation at the intersection of technology, design, and culture.

6. CONCLUSION

In this paper, This paper have introduced and demonstrated a novel interdisciplinary approach for the design and fabrication of interactive art installations, leveraging a versatile soap bubble transfer printing technique for flexible electronics. Our methodology addresses critical challenges associated with integrating delicate electronic components onto complex, non-planar, and aesthetically sensitive artistic substrates. By harnessing the unique properties of soap bubbles—their ultrathin nature, rheological deform ability, adhesion-independent transfer, and low-contamination characteristics—This paper have successfully achieved precise, damage-free, and seamlessly integrated electronic functionalities within diverse art forms.

This paper presented three distinct case studies that validate the efficacy and versatility of our approach: the integration of flexible pressure sensors onto textile substrates for responsive fabrics, the fabrication of a conformal LED array on a sculpted surface, and the development of a large-scale interactive sound-reactive art installation. These demonstrations unequivocally illustrate the technique's ability to handle a wide array of materials and geometries, enhance aesthetic integration, and enable sophisticated interactive performances that were previously difficult to realize with conventional manufacturing methods. The results highlight how the soap bubble transfer printing technique facilitates a harmonious blend of advanced technology with artistic expression, opening new frontiers for creative exploration.

This work makes significant contributions by bridging the gap between cutting-edge flexible electronics manufacturing and the dynamic field of interactive art. It provides artists and designers with a powerful new tool to embed intelligence and responsiveness directly into their creations, fostering a deeper, more engaging dialogue between art and its audience. The interdisciplinary framework presented herein serves as a robust foundation for future research and development at the intersection of engineering, design, and culture.

Looking ahead, future work will focus on several key areas. This paper aim to further optimize the soap solution and bubble generation parameters for even greater stability and transfer efficiency across a broader spectrum of electronic components and substrate materials. Automation of the entire transfer printing process, including automated vision-guided alignment and multi-component integration, will be a priority

to enhance throughput and scalability. Furthermore, This paper plan to explore the longterm durability and reliability of these integrated art pieces in various environmental conditions, ensuring their longevity and performance in public installations. Finally, expanding the application of this technique to other interdisciplinary domains, such as smart medical implants, advanced robotics, and sustainable packaging, holds immense promise for leveraging the unique advantages of soap bubble transfer printing beyond the realm of art.

REFERENCES

- [1] Zhao, Q., Li, K., Sun, F., Xu, H., Hu, X., Dong, J., ... & Li, M. (2025). A versatile transfer printing technique through soap bubble. *npj Flexible Electronics*, 9(1), 76.
- [2] Shin, Yoonsoo, Seungki Hong, Yong Chan Hur, Chanhuk Lim, Kyungsik Do, Ji Hoon Kim, Dae-Hyeong Kim, and Sangkyu Lee. "Damage-free dry transfer method using stress engineering for high-performance flexible two- and three-dimensional electronics." *Nature Materials* 23, no. 10 (2024): 1411-1420.
- [3] Shao, Y., Wei, L., Wu, X., Jiang, C., Yao, Y., Peng, B., ... & Ping, J. (2022). Room-temperature high-precision printing of flexible wireless electronics based on MXene inks. *Nature communications*, 13(1), 3223.
- [4] Zumeit, Ayoub, Abhishek Singh Dahiya, Adamos Christou, Dhayalan Shakthivel, and Ravinder Dahiya. "Direct roll transfer printed silicon nanoribbon arrays based high-performance flexible electronics." *npj Flexible Electronics* 5, no. 1 (2021): 18.
- [5] Hobbie, Hansel Alex, James L. Doherty, Brittany N. Smith, Paolo Maccarini, and Aaron D. Franklin. "Conformal printed electronics on flexible substrates and inflatable catheters using lathe-based aerosol jet printing." *npj Flexible Electronics* 8, no. 1 (2024): 54.
- [6] Park, S. H., Kim, T. J., Lee, H. E., Ma, B. S., Song, M., Kim, M. S., ... & Lee, K. J. (2023). Universal selective transfer printing via microvacuum force. *nature communications*, 14(1), 7744.
- [7] Gao, Zhan, Yang Fu, Qiang Zhang, Jian Li, Zhiyuan Li, Guihuan Guo, Dengfeng Li, gkun Zhou, Danguan Lei, and nge Yu. "Plasmonic printing of high-performance metal oxide electronics under room temperature." *Nature Materials* (2025): 1-10.
- [8] Li, Weiwei, Mohammad Vaseem, Shuai Yang, and Atif Shamim. "Flexible and reconfigurable radio frequency electronics realized by high-throughput screen printing of vanadium dioxide switches." *Microsystems & nanoengineering* 6, no. 1 (2020): 77.
- [9] Lin, Rongzhou, Chengmei Jiang, Sippanat Achavananthadith, n Yang, Hashina Parveen Anwar Ali, Jianfeng, Yuxin Liu et al. "Soft electronics based on particle engulfment printing." *Nature Electronics* 8, no. 2 (2025): 127-134.
- [10] Liu, G., Li, X., Qiu, Y., Zeng, C., Zhu, X., Wang, C., ... & Shao, J. (2024). Root-inspired, template-confined additive printing for fabricating high-robust conformal electronics. *Microsystems & Nanoengineering*, 10(1), 191.
- [11] Shi, C., Jiang, J., Li, C., Chen, C., Jian, W., & Song, J. (2024). Precision-induced localized molten liquid metal stamps for damage-free transfer printing of ultrathin membranes and 3D objects. *Nature Communications*, 15(1), 8839.
- [12] Harnois, M., Himdi, M., Yong, W. Y., Rahim, S. K. A., Tekkouk, K., & Cheval, N. (2020). An improved fabrication technique for the 3-D frequency selective surface based on water transfer printing technology. *Scientific reports*, 10(1), 1714.
- [13] Wei, R., Li, H., Chen, Z., Hua, Q., Shen, G., & Jiang, K. (2024). Revolutionizing wearable technology: advanced fabrication techniques for body-conformable electronics. *npj Flexible Electronics*, 8(1), 83.
- [14] Datta, R. S., Syed, N., Zavabeti, A., Jannat, A., Mohiuddin, M., Roku nuzzaman, M., ... & Daeneke, T. (2020). Flexible two-dimensional indium tin oxide fabricated using a liquid metal printing technique. *Nature Electronics*, 3(1), 51-58.
- [15] He, Y., Lv, Z., Liu, Z., Yang, M., Ai, W., Chen, J., ... & Wu, J. (2025). Sacrifice-layer-free transfer of wafer-scale atomic-layer-deposited dielectrics and full-device stacks for two-dimensional electronics. *Nature Communications*, 16(1), 5904.
- [16] Lepak-Kuc, S., Kądziela, A., Staniszevska, M., Janczak, D., Jakubowska, M., Bednarczyk, E., ... & Żołek-Tryznowska, Z. (2024). Sustaina

- ble, cytocompatible and flexible electronics on potato starch-based films. *Scientific Reports*, 14(1), 18838.
- [17] Li, Y., Su, J., & Chen, X. (2024). Damage-free transfer printing. *nature materials*, 23(10), 1313-1314.
- [18] Jose, M., Vijjapu, M. T., Neumaier, L., Rauter, L., Chakkunny, A. H., Corzo, D., ... & Deferme, W. (2025). Convergence of biocompatible printed electronics and sensing in wound dressings: a leap forward in sustainable health monitoring. *npj Flexible Electronics*, 9(1), 46.
- [19] Ahmedien, D. A. M. (2024). A drop of light: an interactive new media art investigation of human-technology symbiosis. *Humanities and Social Sciences Communications*, 11(1), 1-20.
- [20] Tian, Y., Zhou, W., Viscione, M., Dong, H., Kammer, D. S., & Fink, O. (2025). Interactive symbolic regression with co-design mechanism through offline reinforcement learning. *Nature Communications*, 16(1), 3930.
- [21] Roels, J., Vernailen, F., Kremer, A., Gonçalves, A., Aelterman, J., Luong, H. Q., ... & Saeyns, Y. (2020). An interactive ImageJ plugin for semi-automated image denoising in electron microscopy. *Nature communications*, 11(1), 771.
- [22] Wang, Y., Wang, T., Li, S., He, X., Li, M., Wang, Z., ... & Liu, T. Y. (2024). Enhancing geometric representations for molecules with equivariant vector-scalar interactive message passing. *Nature Communications*, 15(1), 313.
- [23] Pirch, S., Müller, F., Iofinova, E., Pazmandi, J., Hütter, C. V., Chiettoni, M., ... & Menche, J. (2021). The VRNetzer platform enables interactive network analysis in Virtual Reality. *Nature communications*, 12(1), 2432.
- [24] Huijben, T. A., Anderson III, A. G., Sweet, A., Hoops, E., Larsen, C., Awaysan, K., ... & Royer, L. A. (2025). inTRACKtive: a web-based tool for interactive cell tracking visualization. *Nature Methods*, 1-3.
- [25] Liu, J., Xu, X., Qiu, Y., & Wang, C. (2025). Dual-stream interactive mechanism with multi-modal hierarchical aggregation transformer for gait recognition. *Scientific Reports*, 15(1), 26079.
- [26] Saukkoriipi, M., Sahlsten, J., Jaskari, J., Orsmaa, L., Kangas, J., Rasouli, N., ... & Kaski, K. (2025). Interactive 3D segmentation for primary gross tumor volume in oropharyngeal cancer. *Scientific Reports*, 15(1), 28589.
- [27] Siette, J., Hope, E., Karamacoska, D., Jacobs, R., & Catanzaro, M. (2024). Effectiveness of an interactive brain health campaign on motivation for dementia risk reduction: a pretest-posttest evaluation. *Scientific Reports*, 14(1), 22557.
- [28] Slack, D., Krishna, S., Lakkaraju, H., & Singh, S. (2023). Explaining machine learning models with interactive natural language conversations using TalkToModel. *Nature Machine Intelligence*, 5(8), 873-883.

- [29] Prompsy, P., Kirchmeier, P., Marsolier, J., Deloger, M., Servant, N., & Vallot, C. (2020). Interactive analysis of single-cell epigenomic landscapes with ChromSCape. *Nature communications*, 11(1), 5702..

ACKNOWLEDGEMENTS

None.

FUNDING

None.

AVAILABILITY OF DATA

Not applicable.

ETHICAL STATEMENT

All participants provided written informed consent prior to participation. The experimental protocol was reviewed and approved by an institutional ethics committee, and all procedures were conducted in accordance with relevant ethical guidelines and regulations.

AUTHOR CONTRIBUTIONS

Siyu Ying conducted the fabrication experiments, developed the soap bubble transfer printing technique for flexible electronics, and analyzed the integration of electronic components in interactive art installations, while Tianjian Cui conceived and supervised the study, guided the interdisciplinary design framework, and contributed to result interpretation and manuscript revision.

COMPETING INTERESTS

The authors declare no competing interests.

Publisher's note WEDO remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Open Access This article is published online with Open Access by BIG.D and distributed under the terms of the Creative Commons Attribution Non-Commercial License 4.0 (CC BY-NC 4.0).

© The Author(s) 2026